


Silicone frames

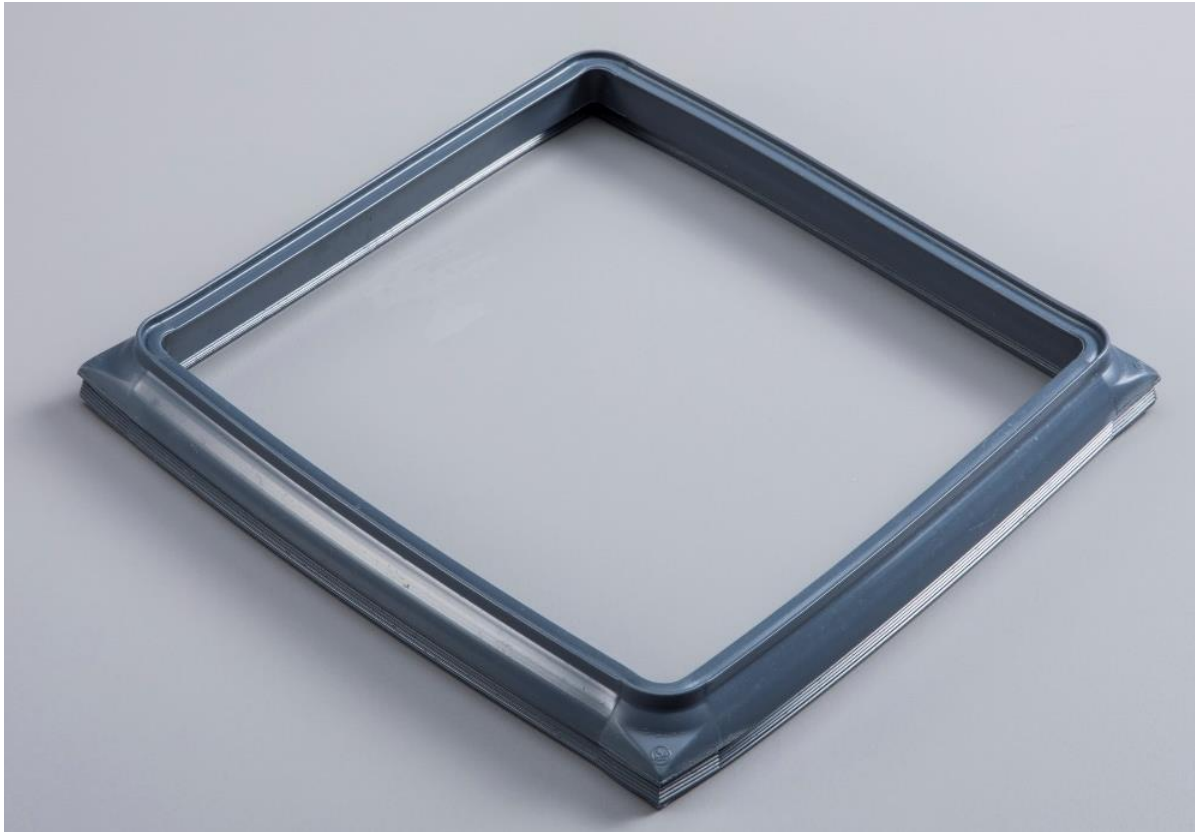

Production program:

rings, frames, connections (corner, elbow), confections

Manufacturing technology:

end to end vulcanisation, tight corner vulcanisation, scorch

Qualities:

Hardness: 15° Shore up to 85° Shore A DIN 53505 according to extruded material

Food grades upon agreement conform with

- BfR XV.Silicone
- FDA § 177.2600

Medical grades upon agreement conform with

- USP Class VI
- ISO 10993

Colours:

translucent or coloured (according to extruded material)
other colours upon request

Tolerances:

E2/ L2 DIN ISO 3302-1
other tolerances upon request

Dimensions:

Inside ring diameter:
minimum 150 mm

Inside frame diameter:
minimum 200 mm x 200 mm